

M-CON-ENOCN-p: EnOcean integration module

Document number: PO-038-EN Version: 1.4.0 Date of publication: April 21, 2026



Technical data

Supply voltage
11 – 16V DC

Current consumption
20mA

Communication interface
EnOcean

Number of connectable devices
up to 250 devices

Dimensions

Width
41mm

Height
44mm

Depth
16.5mm

Environment

Temperature
-40 – 50°C

Humidity
≤95%RH, non-condensing

The image above is for illustration purpose only. The actual module may vary from the one presented here.

General features

Module M-CON-ENOCN-p is a component of the Ampio system. Required voltage to power the module is 11 – 16V DC. The module is controlled via CAN bus.

The module is used for integration with devices that support the EnOcean 868Mhz wireless communication standard. With the use of the module, it is possible to receive unencrypted messages from a defined pool of devices that communicate via the EnOcean technology. These messages are converted into a form suitable for the CAN bus, which allows them to be used within the building automation logic.

It is possible to define up to 250 EnOcean devices whose messages will be interpreted by the M-CON-ENOCN-p module.

Typical application

- Integration with devices equipped with an EnOcean interface, such as:
 - wireless and battery-free switches;
 - temperature sensors, motion sensors, NFC;
 - handles with position sensors;
 - etc.

Installation

The dimensions of the module enable its installation in a standard junction box. In order to start the module, it must be connected to the CAN bus. The bus of the Ampio system consists of four wires - two for power and two for communication between the modules.

Device status LEDs

On the front of the module there are signalling LED indicators. The red LED with the label CAN indicates the status of communication on the CAN bus:

- one regular flash every 1 sec. – CAN bus communication is working properly,
- two regular flashes every 1 sec. – the module is not receiving information from other modules,
- three regular flashes every 1 sec. – the module cannot send information to the CAN bus;
- seven rapid flashes – the device is in bootloader mode; you must load the firmware onto the device.

Programming


The module is programmed with the use of the [Ampio Designer](#) software. It allows you to modify the parameters of the module and define its behaviour in response to signals directly available to the module as well as general information coming from all devices present in the home automation bus.

Configuration of the list of addresses of EnOcean devices whose messages will be interpreted by the M-CON-ENOCN-p module is possible using the Ampio Designer software. This implies that a device from the M-SERV family must be present in the building automation bus while the configuration activities are being performed.

Module dimensions

Dimensions expressed in millimeters.

The dashed lines mark the areas where the device connectors or its other elements can be located.

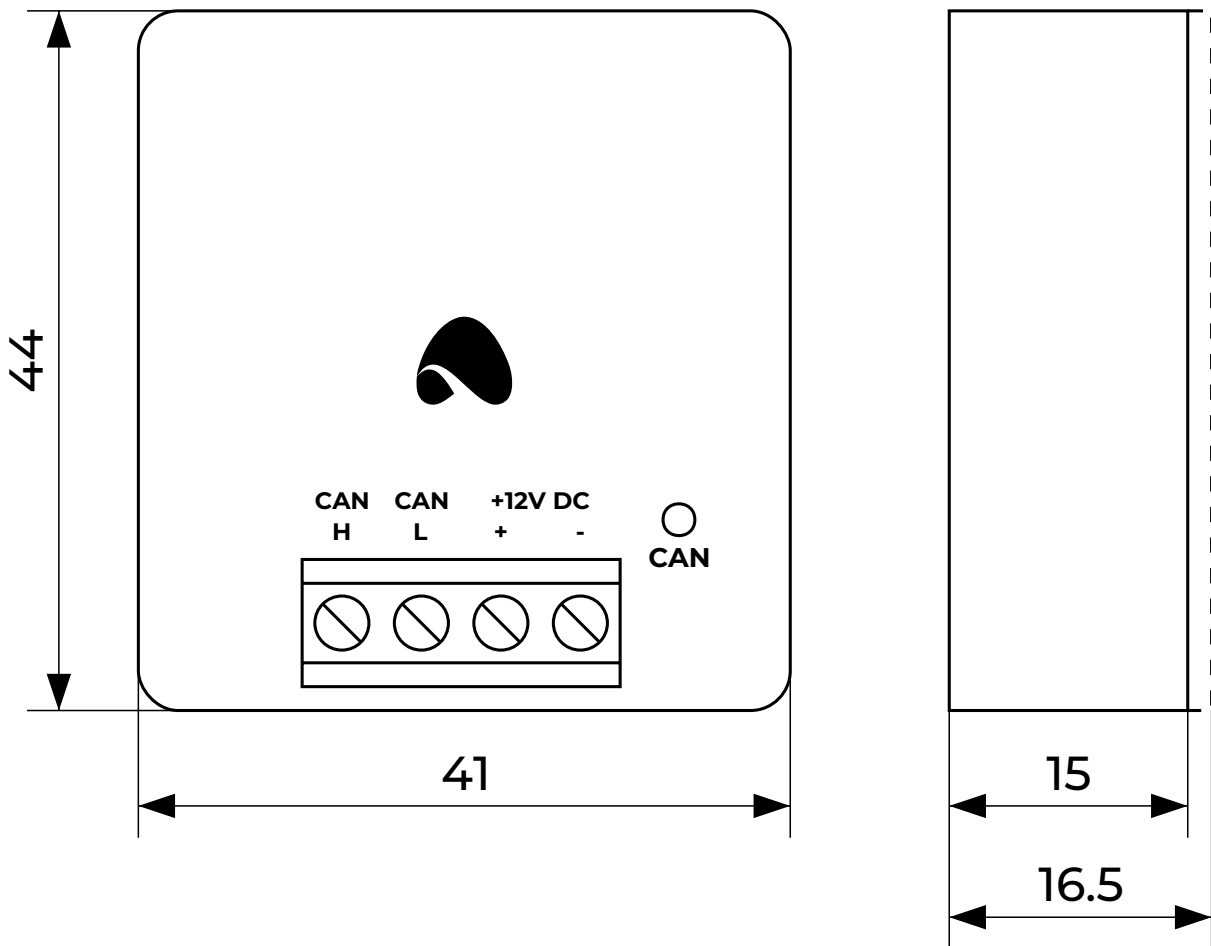

Connection diagram

