

Smart roller blind positioning

Document number: PO-205-EN Version: 1.0 Date of publication: September 5, 2023

This block helps to set roller position in relation to sun position.




Importing block

Download this *json* file:

- [sun_tracking.json](#)

Go to *Node-red*.

Press `ctrl + i` or `⌘-i` in your workplace or in top right corner press settings (three horizontal lines) and *Import*.

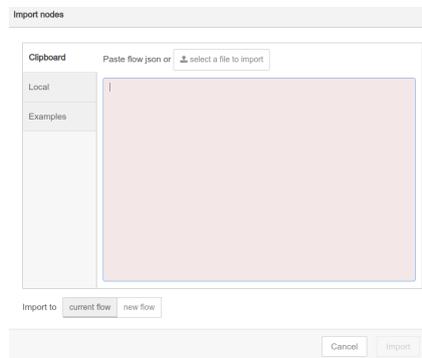

Enter here file or file content, press *Import*.

Block configuration

From now on there should be this block in *subflows*.



Drag this block to your flow and double click it. Enter your data here (latitude, longitude etc.).

Properties

Name

latitude 54.42

longitude 14.56

ip 192.168.1.1

login API_login


password API_password

roller id 534

[%] of sun 100


window location NORTH

For block to work properly you also need to download and install Node named *node-red-contrib-sun-position*.

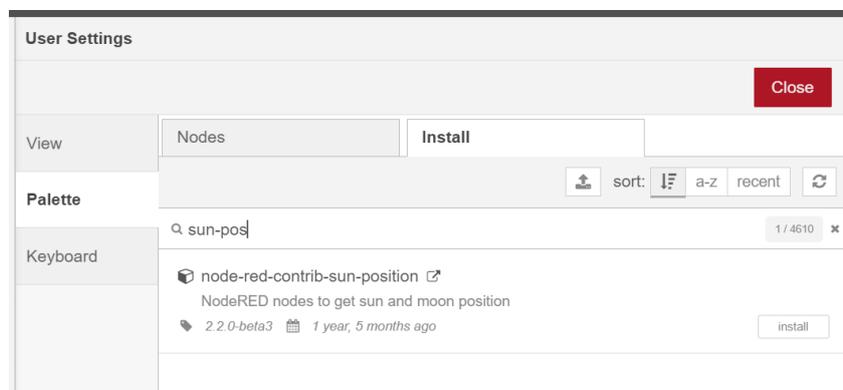

How to use configured block

Now you can just use *inject* block.

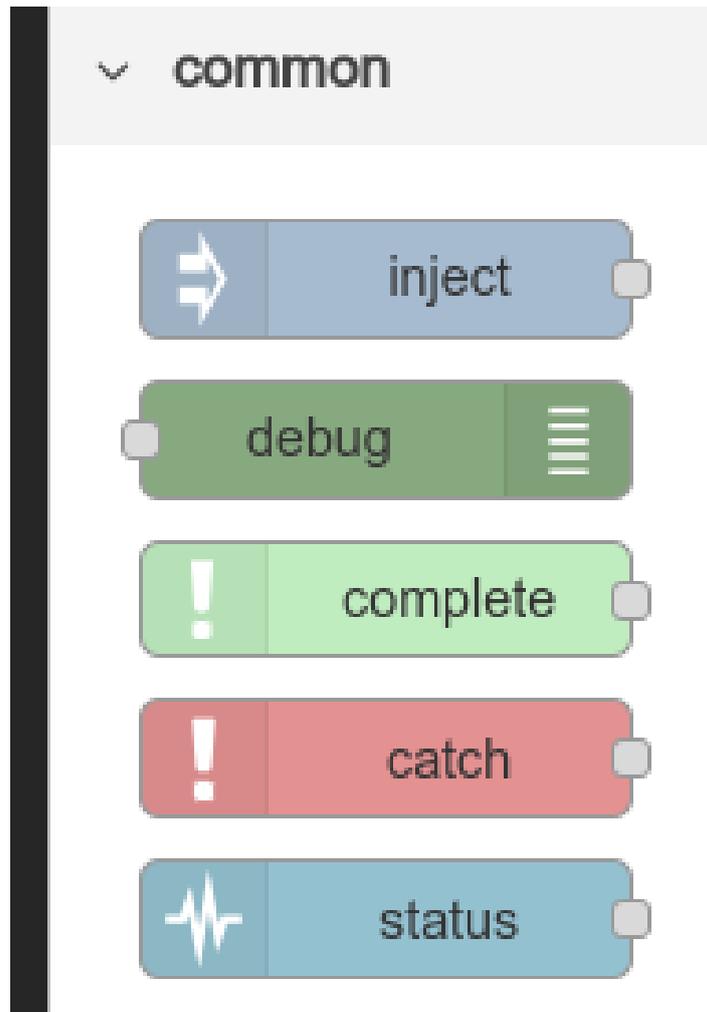

Just drag first block and plug in.



Press *Deploy*



and click on blue button.



Roller should point at sun.

If you want roller to point at sun for example every 15 minutes then double click on blue block and set repeat to interval and set interval to 15 minutes. If you also want for algorithm to start working after server restart, pick *Inject once after*.

Inject once after seconds, then

Repeat

every

Now click on blue button, after **deploying** interval should start working.

Additional

If you want to change variable *percentage of the sun* (how much of sun light enters the room), you can just edit field in the *Sun tracking* block and enter value from 0 to 100.

 [%] of sun