

M-IN-AC4s: Module with four AC inputs

Document number: PO-022-EN Version: 1.1.0 Date of publication: February 18, 2025



Technical data

Supply voltage
11 – 16V DC

Current consumption
25mA

Number of AC inputs
4

AC inputs voltage
110 – 250V AC

Dimensions

Width
35mm, 2 spaces/modules in DB

Height (incl. plugs)
110mm

Depth
59mm

Environment

Temperature
-40 – 50°C

Humidity
≤95%RH, non-condensing

The image above is for illustration purpose only. The actual module may vary from the one presented here.

General features

Module M-IN-AC4s is a component of the Ampio system. Required voltage to power the module is 11 – 16V DC. The module is controlled via CAN bus.

The module has four AC inputs.

AC inputs

The module has inputs that go into an active state when they are connected to an alternating voltage in the range of 110 – 250V AC. These inputs can be useful for phase presence detection or integration with devices with AC outputs, e.g. PIR or microwave presence detectors. They can also be used to connect classic light switches or other devices with potential-free contact outputs.

The AC inputs are galvanically separated from the low-voltage circuits of the module and the CAN bus.

Typical application

- Phase presence detection;
- integration with devices with AC outputs.

Installation

The module is designed for mounting on a 35mm DIN rail. The module's width is 35mm, 2 spaces/modules in DB. In order to start the module, it must be connected to the CAN bus. The bus of the Ampio system consists of four wires - two for power and two for communication between the modules.

In addition to the CAN bus connector, the device has a connector with screw terminals, enabling the connection of four AC lines to the module inputs.

Device status LEDs

On the front of the module there are signalling LED indicators. The green LED with the label *CAN* indicates the status of communication on the CAN bus:

- one regular flash every 1 sec. – CAN bus communication is working properly,
- two regular flashes every 1 sec. – the module is not receiving information from other modules,
- three regular flashes every 1 sec. – the module cannot send information to the CAN bus;


Apart from the LED that indicates the communication bus status on the front of the device, there are also 4 red LEDs indicating the status of the AC inputs.

Programming

The module is programmed with the use of the [Ampio Designer](#) software. It allows you to modify the parameters of the module and define its behaviour in response to signals directly available to the module as well as general information coming from all devices present in the home automation bus.

Module dimensions

Dimensions expressed in millimeters.

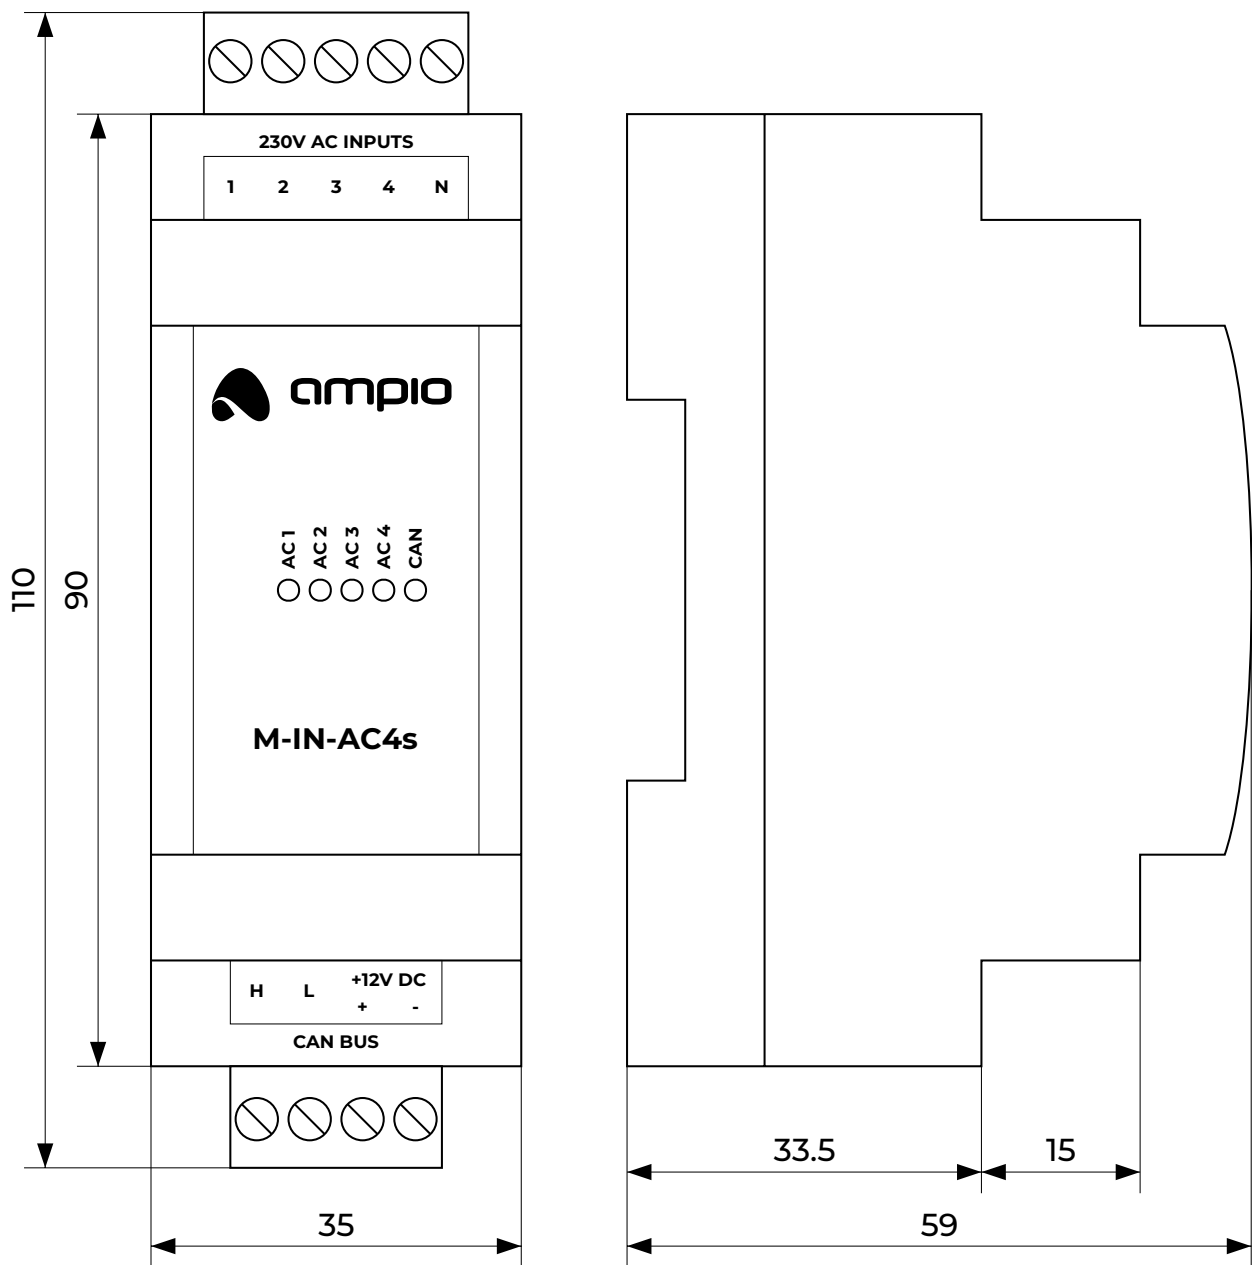

Connection diagram

