

M-REL-2p: Module with two relay outputs

Document number: PO-027-EN Version: 1.2.0 Date of publication: September 8, 2023



Technical data

Supply voltage	11 – 16V DC
Idle current consumption	25mA
Maximum current consumption	70mA
Number of relay outputs	2
Maximum AC current of a single relay output ($\varphi \approx 0$)	10A
Maximum total current of all relay outputs	16A

Technical data cont.

Maximum power of a single relay output's load ($\varphi \approx 0$)	2000VA
Maximum relay switching voltage	250V AC
Roller shutter and blinds drives controller	yes
Number of ground detecting inputs	2
1-Wire	up to 6 sensors

Dimensions

Width	47.5mm
Height	47.5mm
Depth	22mm
Environment	
Temperature	-40 – 50°C
Humidity	≤95%RH, non-condensing

The image above is for illustration purpose only. The actual module may vary from the one presented here.

General features

Module M-REL-2p is a component of the Ampio system. Required voltage to power the module is 11 – 16V DC. The module is controlled via CAN bus.

The module has two relay outputs, two ground-detecting inputs and a 1-Wire interface. It also supports the functionality of a controller for the roller shutters and blinds' drives.

Relay outputs

The module has relay outputs that enable switching on resistive and inductive loads. The module relays are normally open. The table below shows the permissible operating parameters of the relays depending on the nature of the load.

The nature of the load	Maximum supply voltage	Maximum long-term permissible current	Maximum load power
AC1: Resistive or moderately inductive AC loads	250V AC	10A	2000VA
AC15: Inductive AC loads	250V AC	1.5A	300VA
DC1: Resistive or moderately inductive DC loads	30V DC	10A	250VA
DC13: Inductive DC loads	30V DC	2.5A	30VA

One of the contacts of each of the relays is connected to a common terminal.

Roller shutter and blinds drives controller

As part of the module configuration, it is possible to activate the functionality of a roller shutter and a blind drives' controller. This mode is intended for the control of devices powered by electric motors with a variable direction of movement

and a limited movement range. For example, roller shutters and blinds' drives. However, this mode can also be used in other devices of a similar nature, such as, e.g. gates.

In the controller mode for roller shutters and blinds' drives, pairs of the device's relay outputs work as a single compound output dedicated to controlling a single connected device.

The controller mode for roller shutters and blinds' drive is designed to control devices with built-in limit switches that disconnect the drive's power supply when the ends of the range of motion are reached.

In the primary operation mode of the relay outputs, they are controlled by switching on or off individual outputs. In the case of pairs of relays operating in the roller shutters and blinds' drive controller mode, the control is performed by closing and opening commands or by setting the opening level. When it comes to blinds, it is also possible to set the position of slats.

During operation, the module estimates the state of the controlled device, i.e. the degree of opening and the position of slats (if applicable). This information is available within the building automation bus and is used internally to perform control in terms of the degree of opening or deflection angle of the slats.

A single pair of relays operating in a controller mode for roller shutters and blinds' drives **can only be connected to a single drive**. Any other connection may result in incorrect operation of the device, as well as permanent damage to both, the module and the drive.

Ground detecting inputs

The module has inputs that go into the active state when they are shorted to ground. They can be used in the case of any devices with potential-free contact outputs, e.g. wall switches, reed switches, buttons, switches, etc. They can also be used for integration with devices with potential-free relay outputs or optocoupler outputs with a collector voltage greater than 12V.

Temperature sensors

The module is equipped with a 1-Wire interface connector that allows to connect up to 6 digital Dallas DS18B20 temperature sensors. The temperature measurement result is available for all devices operating within the building automation bus. It may turn out to be particularly useful for purposes related to temperature regulation, or to present the measurement result on touch panels and in a mobile application.

The total length of the 1-Wire bus cable to which the temperature sensors are connected cannot exceed 15m.

Typical application

- Switching on the lighting;
- control of motor devices;
- control of blinds and shutters;
- connecting classic light switches or other devices with potential-free contact outputs;
- integration with devices with potential-free relay outputs;
- integration with devices with optocoupler outputs;
- room temperature measurement.

Installation

The dimensions of the module enable its installation in a standard junction box. In order to start the module, it must be connected to the CAN bus. The bus of the Ampio system consists of four wires - two for power and two for communication between the modules.

In addition to the CAN bus interface, the device has a relays output connector. One of the contacts of each of the relays is connected to a common terminal.

Device status LEDs

On the front of the module there are signalling LED indicators. The red LED with the label *CAN* indicates the status of communication on the CAN bus:

- one regular flash every 1 sec. – CAN bus communication is working properly,
- two regular flashes every 1 sec. – the module is not receiving information from other modules,
- three regular flashes every 1 sec. – the module cannot send information to the CAN bus;


Programming

The module is programmed with a special programmer, available for authorised technicians, and the Ampio Smart Home CAN configurator software. It allows you to modify the parameters of the module and define its behaviour in response to signals directly available to the module as well as general information coming from all devices present in the home automation bus.

If the functionality of the roller shutters and blinds' drives controller is used, each connected device should be calibrated. The calibration is performed by defining the time parameters of full opening and closing, and the time parameters of the rotation of slats of the blinds (if applicable).

Module dimensions

Dimensions expressed in millimeters.

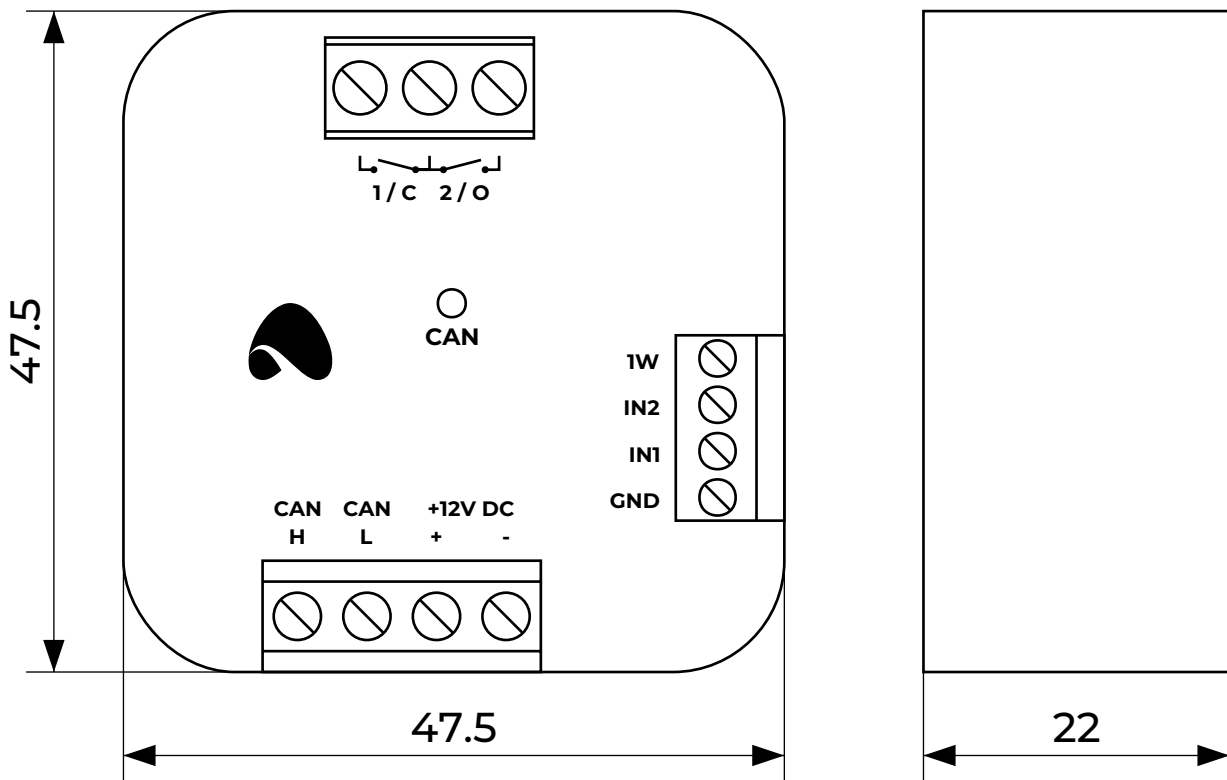

Connection diagram

